




双电路双接点 附带扣击感的好触感瞬时动作。

■ 产品一览


行程 (mm)	电路数	接点数	最小订货单位 (pcs.)		产品编号
			日本	出口	
1.7	2	2	500	2,000	SPEJ110100

形状



μί@ZT¥•I è

F£ZT ù£“LF£¥ /F£ZTb
 Ñ © ZT“ j ¥\$” , \$\$ 5 É›© b oα¥öα†ÊÂ ^të © %çZTP“0£ {b
 Ñ sf

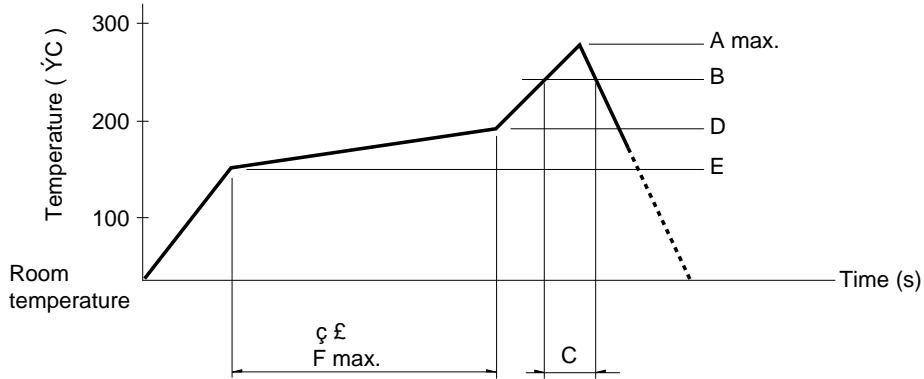

" í@~	" ¥ T NBY	# ¥	\$ T	% ¥	& ¥	' T
SPEJ						
SPEF						
SPEH						

ÿ

•Hq¹†—É^ð¥,†qL ë ¥Ñ ð É^ð¥«ÉvI” ©í^ðÑ „71VëÑ öμ“v¥,]
 ` 1¿71VëÑ 9h •Hq=P“b
 ð í@c¥ÖÊHq μ,)hY5 sÉ›’a-aP“b

μmýoαZT¥•I è

"	oαÑ	oαHW
SPPJ3, SPPJ2, SPUN, SPPH4, SPPH1	• ¥	T
SPED2, SPED4	• ¥	• T
SPEJ	• ¥	T NBY
SPEF	• ¥	T NBY
SPEH	¥ NBY	T NBY
SPUJ	• ¥	T

μïoZT¥•I è

a“¿'PS 1\$ CPBSE 0~

"	["		ïo	
	ç£Ñ	ç£Ñ HW	oαÑ	oαï2HW
SPPJ3	¥ NBY	T NBY	• ¥	•T
SPUN	¥ NBY	T NBY	• ¥	•T
SPUJ, SPPH4	š		• ¥	•T
SPPJ2, SPPH1, SPED2, SPED4, SPEF	š		• ¥	•T

检测
滑动
按动
旋转
电源
切换式
卧式
立式